


- High quality housing made of 316 stainless steel
- Self priming diaphragm pump, can run dry
- Integral high head automatic transfer pump/tank
- Integrated drip tray
- Easy to service and to maintenance due to the fully removable door
- 15m high flexible Suction hose 1 1/2" (38mm)
- Pump-out Probe meets the European standard ISO 8099
- Different control options (coin, Token, Key or Start/Stop buttons)
- Self priming up to 6m high
- Voltage 400V available



Pump out station LS160W-TS

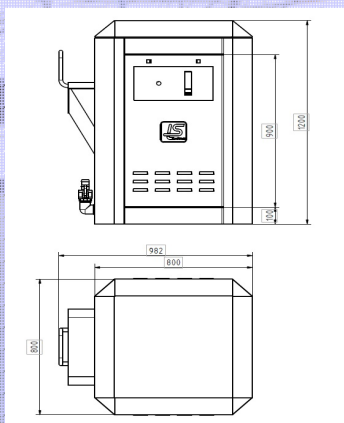

Part No. LS160W-TS

Dimensions:

Length total = 982 mm
Width total = 850 mm
Height = 1200mm

Data:

Capacity	60l/min
Motor Power:	750W
Suction height max:	6m
Discharge length max:	700m
Pressure height max:	25m
Weight:	200kg

LeeSan
Wharf Road, Fenny Compton,
Warwickshire CV47 2FE
Tel +44 (0)1295 770000
www.leesan.com - sales@leesan.com

LeeSan
Marine • Welfare • Leisure