SN32

Saniflo
MARINE RANGE

Pumped Electric, Macerator Toilet

Reliable and comfortable, just like a conventional toilet, the **Sanimarin 32** can be easily installed on a vertical wall. Thanks to its light weight and small size, it is easy to integrate in all areas, and above all, it easily replaces toilets with manual pumps.
Discharge is through conventional 1" - 1½" hose.
Exceptionally easy to install with fresh water for flushing supplied by connection into the boat's water pressure system.
Will discharge to a higher head than most other toilets.




- **Minimal Routine Maintenance**
- **Easy to Clean**
- **Very Quiet**
- **2 Year Guarantee**

Part No:	12VDC	24VDC
Toliet	SN32-12	SN32-24

Dimensions

A	B	C	D	E	
365	430	320	370	255	Dimensions in mm

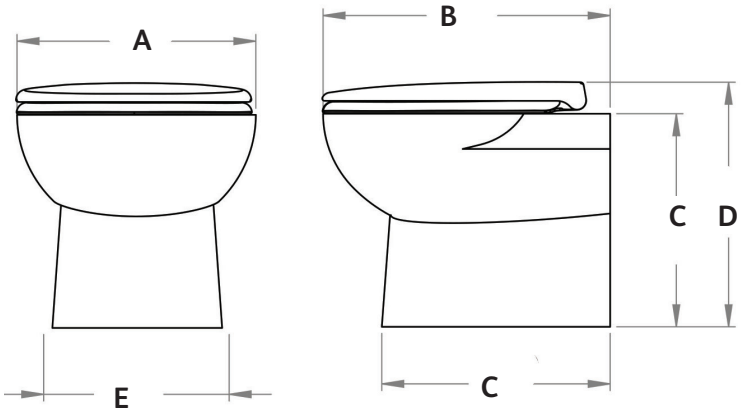

Technical Specifications

Water Consumption	1.2 to 2.4L	
Water Pressure	20 - 45 PSI	
Water Connection	¾" BSP	
Min. dynamic pressure	1.7 Bar	
Recommended pump flow rate	11 L / min	
Waste Outlet	1" or 1½"	(25 or 38mm)
Electric Consumption:	12 Volt	25 Amps
	24 Volt	15 Amps
	12 Volt Motor	300 Watts
	24 Volt Motor	360 Watts
Weight	19.0 Kg	

Note:
Salt water flush requires an additional, raw water pressure pump.

Toilet Control Systems

- **Switch Comfort**
- **Button Premiun**
- **Keyboard Luxe**

details overleaf

Lee Sanitation Ltd.
Wharf Road. Fenny Compton
Warwickshire, CV47 2FE

Sales: 01295 770000
E: sales@leesan.com
W: leesan.com

Company Reg No: 2332435
VAT Reg No: 522 1528 81

Updated 09/10/26

LeeSan
Marine • Welfare • Leisure

www.leesan.com
T:01295 770000

SaniMarin Toilet Control Systems

Saniflo MARINE RANGE


Switch Comfort



A Rocker Switch
- A flushing position
- A Maceration - pumping position


The duration of each cycle is manually controlled by the user and can be adjusted as required.

Electrical Installation

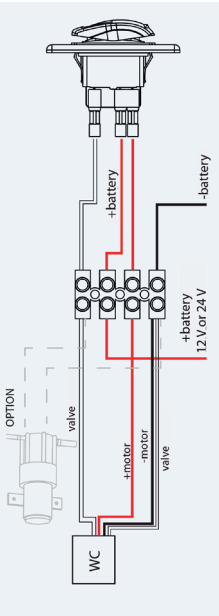

Part No:	Switch Comfort
	03214


Button Premium

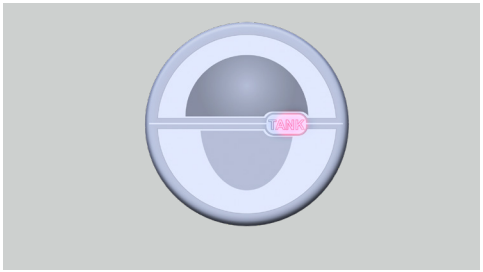

A Push Button, on Toilet Operation
- Two automatic cycles with adjustable water level (1.6 to 3.4 L)
- Dry mode bowl: press and hold the full flush
- A Tank indicator light showing that the black water tank is full

For easier installation, this system can be mounted directly on the bowl (except for Sanimarin 31).

Electrical Installation

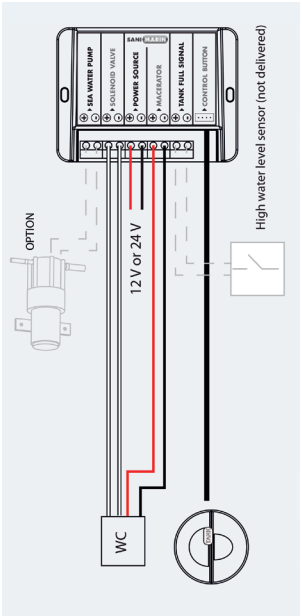


Part No:	Premium Button
	08750

Keyboard Luxe



A Bulkhead Mounted Operation
- Two automatic cycles with adjustable water level (1.6 to 3.4 L)
- A Tank indicator light showing that the black water tank is full
- Dry mode bowl: key pressed to empty the bowl completely in choppy seas

Electrical Installation

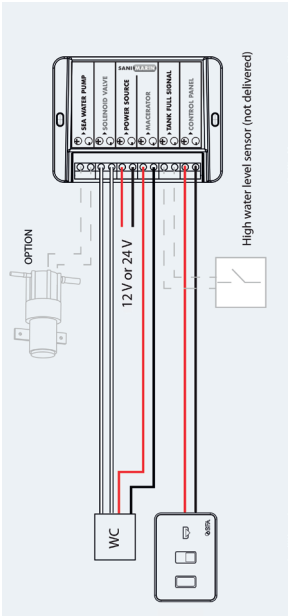

Part No:	Keyboard Luxe
Glass White	08751
Glass Black	08752
Plastic White	08766

BRITISH MARINE INLAND BOATBUILDING · The Yacht Harbour Association Ltd · The Green Blue · Working Together Towards Sustainable Boating · Inland Waterways Association · DOMETIC SANIMARIN SFA Mobile living made easy. · Rheinstrom Pumpenfabrik GmbH · Cinderella Incineration Toilets

Lee Sanitation Ltd.
Wharf Road. Fenny Compton
Warwickshire, CV47 2FE

Sales: 01295 770000
E: sales@leesan.com
W: leesan.com

Company Reg No: 2332435
VAT Reg No: 522 1528 81

PUMP TECHNOLOGY LTD — A Pump Technology Ltd. Group Company

Updated 05/10/26