

SN32 Luxe




Part No:	12VDC	24VDC
Toilet	03557	03558

Dimensions

A	B	C	D	E
365	430	320	370	255

Dimensions in mm

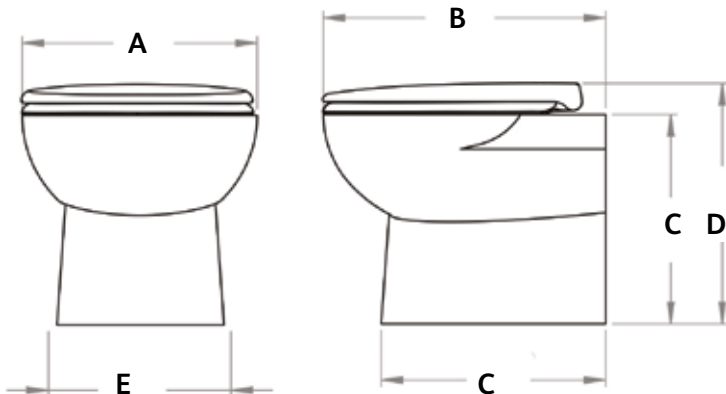

Note:

Salt water flush requires an additional, raw water pressure pump.

Saniflo MARINE RANGE

Pumped Electric, Macerator Toilet

Reliable and comfortable, just like a conventional toilet, the **Sanimarin 32** can be easily installed. Thanks to its light weight and small size, it is easy to integrate in all areas, and above all, it easily replaces toilets with manual pumps.


Discharge is through conventional 1" - 1½" hose. Exceptionally easy to install with fresh water for flushing supplied by connection into the boat's water pressure system.

Will discharge to a higher head than most other toilets.

- Dual Flush Operation
 - 1.2 Litre (Econo-flush)
 - 2.2 Litres (Normal flush)
- Minimal Routine Maintenance
- Easy to Clean
- Very Quiet
- 2 Year Guarantee

Technical Specifications

Water Consumption	1.2 to 2.4L	
Water Pressure	20 - 45 PSI	
Water Connection	¾" BSP	
Waste Outlet	1" or 1½"	(25 or 38mm)
Electric Consumption:	12 Volt	20 Amps
	24 Volt	10 Amps
Start-up-surge:	12 Volt	133 Amps
	24 Volt	69 Amps
Weight	12 Volt Motor	260 Watts
	24 Volt Motor	260 Watts
Weight	16.4 Kg	

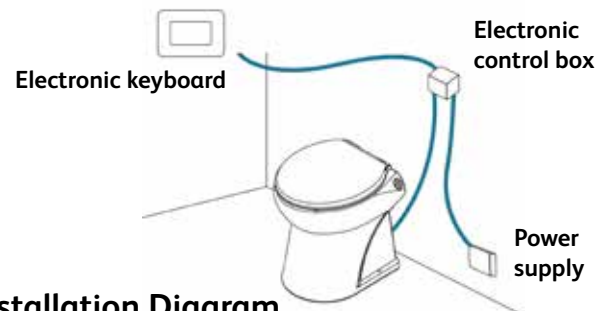

Installation Diagram