

SaniShower

SaniMarin has designed this shower pump specifically for the bathroom market, offering superior quality and design. Its easy installation has contributed to its global popularity.



This **SaniMarin** unit operates with minimal noise, making it an excellent choice for a wide range of applications.

Essential when installing a shower or a sink, a **SaniShower** pump makes it easy to collect waste water on board boats. With its 4 metre long discharge pipe with a diameter ranging from 22 to 32mm, it can be installed either above or below the sea level. Its sturdy design means it can pump waste water at a maximum temperature of 35°C at an average rate of around 70 l/min (12V).

- Minimal Routine Maintenance
- Easy to Clean
- Very Quiet
- 2 Year Guarantee

Dimensions

A	B	C	D	E	F	G	H
359	308	213	30	146	145	46	166

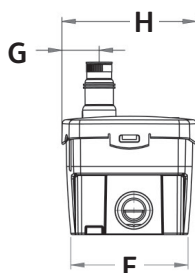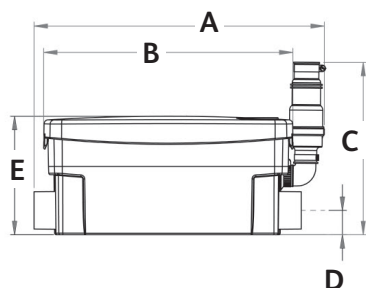

Dimensions in mm

Saniflo

MARINE RANGE



	12VDC	24VDC	240VAC
Part No:	02629	02628	08319

Technical Specifications

Waste Water Temp	35°C	
Inlets Ports	2 x low 40mm both ends	
Outlets Ports	22 to 32mm	
Activation Level	65mm	
Electric Consumption:	12 Volt	28 Amps
	24 Volt	15 Amps
	240 V AC	5 Amps
Motor Power:	12 Volt Motor	340 Watts
	24 Volt Motor	360 Watts
	240 V AC motor	250 Watts
Pump Extraction Flow Rate	12 Volt Motor	70 l / min
	24 Volt Motor	80 l / min
	240 V AC motor	50 l / min
Electrical Rating:	IP 44	
Weight	3.4Kg	