

Gusher Titan


FEATURES

- 105 Litres (28 US gals)
- Easy to install
- Self priming
- Constructed from durable materials
- Easy removable clamp for quick maintenance
- Spring assisted outlet valve for easy priming
- Lightweight pump with light easy action



MODEL	ND4418 / ND4428	ND4424
Hose Connections	38mm (1 1/2") Smooth bore hose connections	
Weight	1.47Kg	1.85Kg
Maximum Head	4 metres	4 metres
Materials	Materials in contact with liquid: Moulded acetal copolymer, glass filled polypropylene, stainless steel, chromed phosphor bronze, Nitrile and Neoprene™	Materials in contact with liquid:
Service Kits	AK4400 Neoprene™ parts and AK4419 Nitrile parts for oil & diesel. Contains Diaphragms & valves	

NOTE: For chemical compatibility please contact distributor

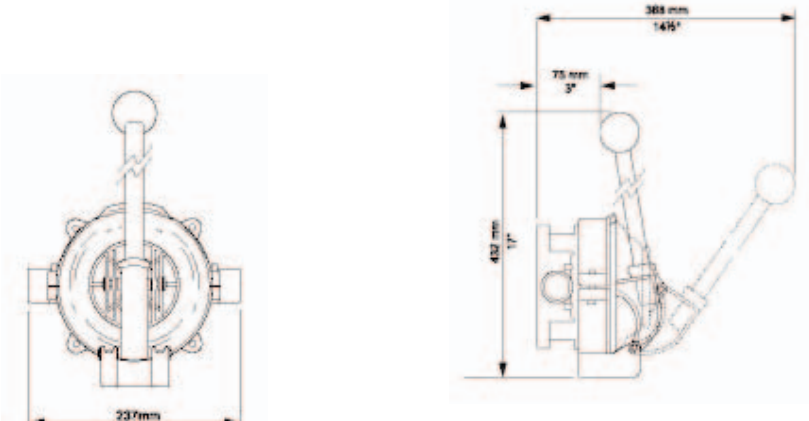

GUSHER TITAN

GUSHER TITAN Output in Litres per minute			
Lift in metres	Head in. metres	At 60 Strokes/minute	At 70 Strokes/minute
1	0.5	114*	126
2	0.5	102	103
3	0.5	88	95

Industrial Titan Models



ND4424 Portable Pump



ND 4428 Floor Mounted pump with long handle