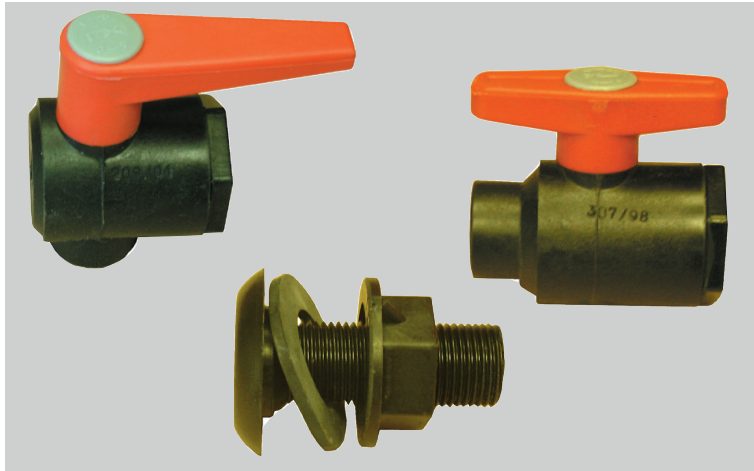


Non Metallic Seacocks

GRANDEX



Non Metallic Seacocks, Through Hull Skin fittings & Valves

Polypropylene Reinforced Fibre Glass
 Resistant to aqueous solutions of acids, alkalines, salts and many solvents, maintaining mechanical strength.






Operating pressure up to 16 Bar at 20° depending on valve model.

Maximum Temperature 110°C

Connections BSP/ISO G female thread

Material Polypropylene homopolymer reinforced 20% fibre glass.

Colour black.

Part Numbers		BSP Thread / Hose Size					
		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	2 Way 90° angle Compact ball valve BSP/ISO G female threaded	01496	01548	01549		01436	01550
	2 Way Straight Through Compact ball valve BSP/ISO G female threaded	01561	01562	01563	01722	01564	01565
	3 Way L-port Compact ball valve BSP/ISO G female threaded	01551	01552	01553		01554	01555
	3 Way T-port Compact ball valve BSP/ISO G female threaded					01559	
	Bulkhead BSP male threaded with seal	01566	01567	01568		01569	01570