

# Saltwater Washdown Kit

## Saltwater Washdown pump and trigger kit

Pump and trigger handset in one easy fit kit delivers high pressure targeted flow

Product code: see table

High capacity pressure pump

Adaptable 4 feet rotate to suit existing installation

Easy maintenance strainer with clear lid for inspection prevents debris from entering the pump

Product code: see table

Easy to use trigger handset

Straight forward installation connects directly to Quick Connect /19mm (3/4") flexible hose / 12.5mm (1/2") flexible hose. No extra connectors needed

# Features and Benefits

## TRIGGER

- Trigger handset with adjustable jet and lockable lever
- Lock/unlock lever to conserve water
- Comfortable trigger design
- Simple push in hose fitting with dry decoupling valve

## PUMP (also available separately)

- High pressure pump - smooth constant flow
- Self-priming up to 3 m (10 ft)
- Internal pressure switch - Extra protection and safety with wires
- Pumps universal mounting arrangement fits any existing installation
- Suitable for use with saltwater and freshwater
- Reliability - Runs dry without damage

## 2 Year Warranty

## Awards and Accreditations

- IP65 rated
- CE marked
- ISO 8846

## COMPLETE YOUR SYSTEM

See page 76-77 for freshwater system accessories

## YOU MAY ALSO LIKE

Twist Deck Shower with integrated temperature and flow controls – page 72

Swim 'N' Rinse deck shower – page 74

Portable pump kit – page 88



## Product Information

### Performance Data


Model	Washdown pump and trigger kit (12 V d.c.)	Washdown pump and trigger kit (24V d.c.)	Washdown Pump 18 ltr (4.8 US gals) (12V d.c.)	Washdown Pump 18 ltr (4.8 US gals) (24 V d.c.)
Product Code	WD1815	WD1825	UF1815	UF1825
Flow Rate / min	18 ltrs (4.8 US gals)			
Voltage	12 V d.c.	24 V d.c.	12 V d.c.	24 V d.c.
Recommended Fuse Size (automotive)	12 Amp	8 Amp	12 Amp	8 Amp
Weight	3.2 kg (7 lbs)		2.9 kg (6.4 lbs)	
Inlet/ outlet size	3/4" / 19mm male thread			
Handset connections	Click fit trigger- snap in joint with flow lock/ dry link coupling		n/a	
Cut out pressure	3 bar (45 psi)			
Semirigid pipework system connections	For Quick Connect 15mm Use WX1542 (included)			
Additional fittings	3/4" Flexible Hose adaptors qty 2 and 1/2" Flexible Hose adaptors qty 2 (included)			
Materials	Pump Body: Glass-filled Polypropylene, Motor Casing: Aluminium, Power-coated Steel Diaphragm, Valves, Feet: Monprene®, Seals: Nitrile®, Fasteners: Stainless Steel			
Materials in contact with fluid	Glass filled polypropylene, Monprene®, Santoprene®, Nitrile®, stainless steel			
Service Kits	Replacement head service kit AK1316 (available separately) Strainer replacement AK1329, Microswitch AK1317			
Maximum Wire Size	2.5mm <sup>2</sup> (13 AWG)			
Maximum Discharge head	30 m (98ft)			
Maximum lift	3m (10ft)			

Note: These specifications are retail items only.

For details of our bulk pack range for boat builders and wholesalers - contact Whale Support.

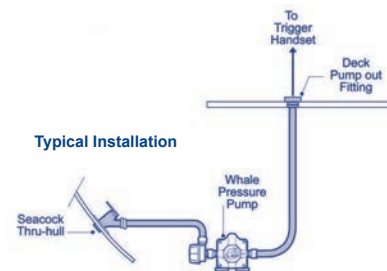

Side View



Front View