

# Supersub Smart




Supersub Smart Family  
Narrow, "Low" profile electric bilge pump range,  
for confined bilge spaces

Fits Deep In The Bilge Where Other Pumps Can't Reach

- No separate bilge switch required
- Automatically controlled patented electric field sensor detects water level
- Waterproof electronics- protected against water ingress
- Quick and easy installation - long wires, strainer and outlet rotate to suit your bilge area
- Unaffected by wave motion
- Environmentally friendly - mercury free
- Includes manual override facility
- Solid state switching - no moving parts
- Suitable for use with fresh or salt water

Model:	650	1100
12v DC	08442	08443
24v DC		08445

## Dimensions:

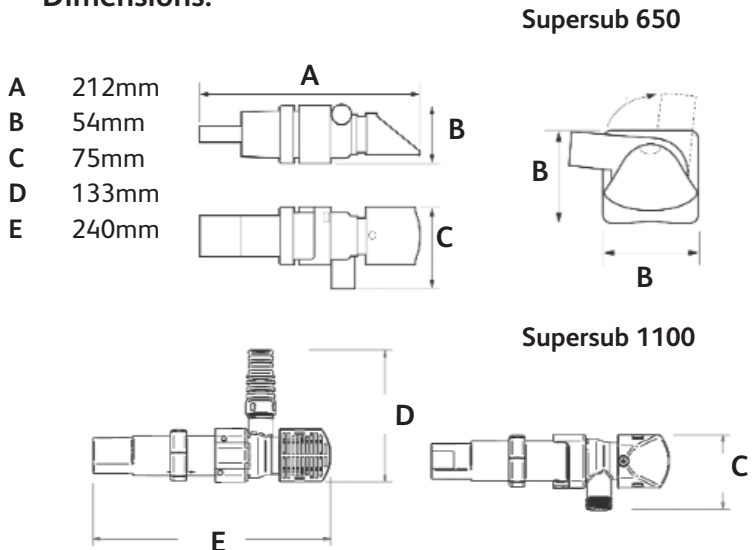

## Technical Specifications:

	650	1100	1100
Open Flow Rate	66lts/min	66lts/min	66lts/min
Flow rate @ 1m Head	34lts/min	47lts/min	47lts/min
Nominal Voltage	12 Vdc	12 Vdc	24 Vdc
Current Draw	3.4 Amps	5 Amps	2.5 Amps
Rec. Fuse Size	5 Amps	5 Amps	2.5 Amps
Weight	0.33 Kgs	0.45Kgs	0.45 Kgs
Max. Discharge head	3m	3m	3m
Hose Connections	19mm	25/28mm	25/28mm

## Typical Installations

