


Deck Fittings

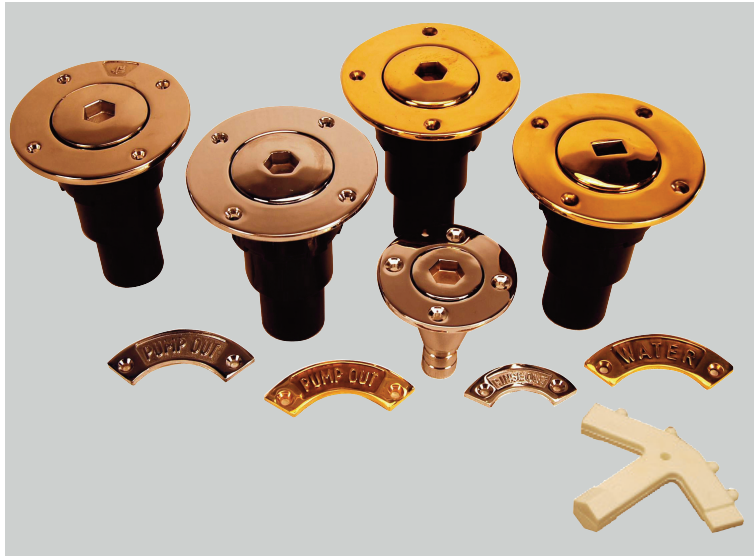

	Brass	Chrome
Pump Out	02047	02048
Rinse Out	02049	02050
Diesel	01129	01131
Water	02051	02052
Cap 1 1/2" Hex	02093	02094
Cap 1 1/2" Slot	02054	02055
Name Plates		
Pump Out	02043	02044
ISO Pump Out	01522	01523
Rinse Out	02056	02057
Diesel	02041	02042
Water	02045	02046
Deck Key	02040	

PUMP-OUT DECK FITTING

- Conforms to International Standards
- Connects to Probe and Screw quayside fittings
- 'O' ring in housing ensures good seal to probe
- Marine quality chrome, traditional polished brass and 316 Stainless Steel
- Standard 16mm (5/8") hexagon cap key
- Easily replaceable "O" ring
- For 38mm (1 1/2") 50mm (2") or 63mm (2 1/2") hose
- Cap release key and identification plate included
Hole Dia. 65mm Flange Dia. 99mm

RINSE-OUT DECK FITTING (Small dia. water fill)

Note: To convert Rinse Out fitting to Water Fill, purchase Slotted Cap.

- Tapered throat grips hose
- Hose tail for 19mm (3/4") deck to tank hose
- Marine quality chrome or traditional polished brass
- Supplied with standard 18mm (5/8") hexagon cap key
- Cap release key and identification plate included
Hole Dia. 45mm Flange Dia. 73mm

DECK FILLERS - Diesel, Fuel, Petrol, Water

- Matches LEESAN Pump-out & Rinse-out fittings
- Cap & flange seal on "O" ring prevents water ingress
- Slotted key for cap release
- Accepts 38mm (1 1/2") 50mm (2") or 63mm (2 1/2") hose or ISO G1 1/2 (1 1/2'BSP) pipe can be directly connected
- Marine quality chrome or traditional polished brass
- Hose tail material has a V2 fire rating, tested to UN94 and suitable for U.K. boat safety scheme compliance
- Cap release key & identification plate included
Hole Dia. 65mm Flange Dia. 99mm

NAME PLATES (ISO STD.)

To comply with International Standard ISO 4567 and British Standard 7162 the Pump-out deck fitting must be identified with the approval symbol.

In the USA an alternative symbol is being promoted by the authorities.

Lee Sanitation manufacturers a label that satisfies the requirements for both of these symbols and should therefore be recognised Worldwide. This label can be supplied with exported fittings.

