

# Twist 'n' Lock Toilet

**xylem**  
 Let's Solve Water



Toilet may be installed either above or below the waterline and may discharge waste overboard or to a holding tank.

Double action piston pump.


Twist "n" Lock action safety handle guards against flooding and waste backflow by locking the waster outlet valve shut

Renewable external seal housing and piston rod guide. Automatic vacuum breaker operated by flush control lever.

Aortic joker valve combines full 38mm (1½") bore with automatic back flow prevention. Reversible pump mounting allows re-assembly for left hand installation.

Model:	Marine Bowl	Large Bowl
Twist 'n' Lock Toilet	05000	05005

## Dimensions

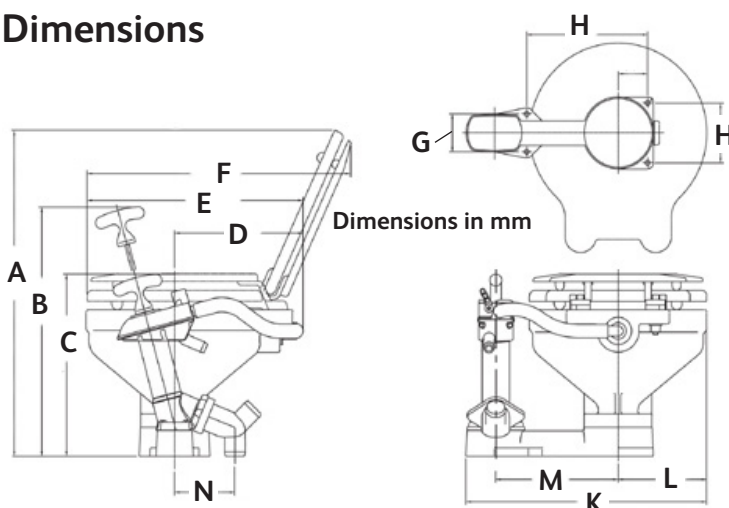

	A	B	C	D	E	F	G
Marine Bowl	615	458	335	247	425	485	70
Large Bowl	700	458	345	280	490	580	70
	H	I	J	K	L	M	N
Marine Bowl	225	110	55	450	165	230	105
Large Bowl	225	110	55	465	180	230	105

Waste pump discharges up to 3 metres (9ft) above outlet elbow.

Bowl moulded in glazed ceramic, pump and base moulded in high impact ABS plastic with selected parts in acetal resin, fitted with stainless steel fastenings, brass weights and neoprene seals and gaskets.

## Technical Specifications

	Marine Bowl	Large Bowl
Water Connection Inlet	¾" BSP	¾" BSP
Waste Outlet	1 ½" BSP (38mm)	1 ½" BSP (38mm)
Weight	9.5 Kg	11Kg